

CSci 4271W
Development of Secure Software Systems
Day 5: Threat modeling, memory safety attacks

Stephen McCamant
University of Minnesota, Computer Science & Engineering

Outline

- Threat modeling, cont'd
- Shellcode techniques
- Examples in GDB
- Exploiting other vulnerabilities

Attacks come with data flows

- Principle: attacks propagate along data flows
- Therefore, enumerate flows to enumerate attacks
 - A more specific prompt, but does not eliminate the need for imagination
 - Other half is types of attacks, see next slide

STRIDE threat taxonomy

- Spooing (vs authentication)
- Tampering (vs integrity)
- Repudiation (vs. non-repudiation)
- Information disclosure (vs. confidentiality)
- Denial of service (vs. availability)
- Elevation of privilege (vs. authorization)

What to do about threats

- Mitigate: add a defense, which may not be complete
- Eliminate: such as by removing functionality
- Transfer functionality: let someone else handle it
- Transfer risk: convince another to bear the cost
- Accept risk: decide that the risk (probability · loss) is sufficiently low

Spooing threat examples

- Using someone else's account
- Making a program use the wrong file
- False address on network traffic

Tampering threat examples

- Modifying an important file
- Rearranging directory structure
- Changing contents of network packets

Repudiation threat examples

- Performing an important action without logging
- Destroying existing logs
- Add fake events to make real events hard to find or not credible

Info. disclosure threat examples

- Eavesdropping on network traffic
- Reading sensitive files
- Learning sensitive information from meta-data

DoS threat examples

- Flood network link with bogus traffic
- Make a server use up available memory
- Make many well-formed but non-productive interactions

Elevation of privilege threat examples

- Cause data to be interpreted as code
- Change process to run as root/administrator
- Convince privileged process to run attacker's code

Outline

Threat modeling, cont'd

Shellcode techniques

Examples in GDB

Exploiting other vulnerabilities

Basic definition

- Shellcode: attacker supplied instructions implementing malicious functionality
- Name comes from example of starting a shell
- Often requires attention to machine-language encoding

Classic `execve /bin/sh`

- `execve(fname, argv, envp)` system call
- Specialized syscall calling conventions
- Omit unneeded arguments
- Doable in under 25 bytes for Linux/x86

Avoiding zero bytes

- Common requirement for shellcode in C string
- Analogy: broken 0 key on keyboard
- May occur in other parts of encoding as well

More restrictions

- No newlines
- Only printable characters
- Only alphanumeric characters
- "English Shellcode" (CCS'09)

Outline

Threat modeling, cont'd

Shellcode techniques

Examples in GDB

Exploiting other vulnerabilities


Non-control data overwrite

- Overwrite other security-sensitive data
- No change to program control flow
- Set user ID to 0, set permissions to all, etc.

Heap meta-data

- Boundary tags similar to doubly-linked list
- Overwritten on heap overflow
- Arbitrary write triggered on `free`
- Simple version stopped by sanity checks

Heap meta-data

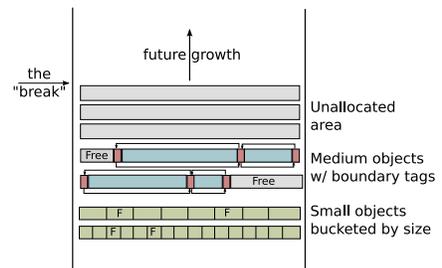

Use after free

- Write to new object overwrites old, or vice-versa
- Key issue is what heap object is reused for
- Influence by controlling other heap operations

Integer overflows

- Easiest to use: overflow in small (8-, 16-bit) value, or only overflowed value used
- 2GB write in 100 byte buffer
 - Find some other way to make it stop
- Arbitrary single overwrite
 - Use math to figure out overflowing value


Null pointer dereference

- Add offset to make a predictable pointer
 - On Windows, interesting address start low
- Allocate data on the zero page
 - Most common in user-space to kernel attacks
 - Read more dangerous than a write


Format string attack

- Attacker-controlled format: little interpreter
- Step one: add extra integer specifiers, dump stack
 - Already useful for information disclosure

Format string attack layout



Format string attack layout

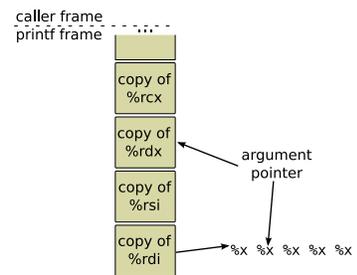

Format string attack: overwrite

- `%n` specifier: store number of chars written so far to pointer arg
- Advance format arg pointer to other attacker-controlled data
- Control number of chars written with padding
- On x86, can use unaligned stores to create pointer